

SPORT SERIES



DEAD MAN'S CURVE 3043


Forward Oil
Reverse Oil
Combined Oil
Buff Area


The charts on this page are generated by Kegel's KOSI software from the lane machine program sheet.

The **OVERHEAD CHART** on the right shows where the conditioner is applied on both the forward and reverse screens. The gradient area is a calculation of how the conditioner might bleed off the buffer brush.

The **COMPOSITE GRAPH** below shows the total amount of conditioner applied to every board. A good way to think about this graph is to envision all the conditioner on the lane being pushed back to the foul line. Once all the conditioner is stacked up, this is what it would look like.




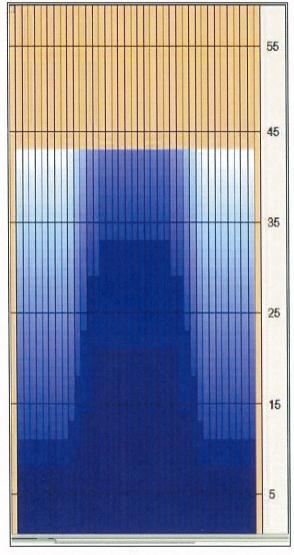

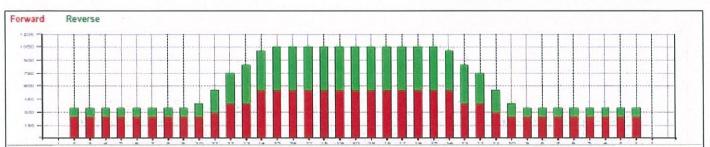



SPORT SERIES



DEAD MAN'S CURVE 3043

This 43 foot pattern has more out of bounds than most patterns because of the increased application of conditioner on the forward pass. With a slight increase slope of oil from the tenth board to the fourteenth board on the return pass, the goal of the player is to target along those boards of extra conditioner without swinging the ball too much towards the outside part of the lane. Players who try to excessively curve the ball with too much speed will find DEAD MAN'S CURVE hazardous to their score.

Latitude Ratio Coordinates

22' 3.0 to 1 41' 2.4 to 1

Longitude Ratio Coordinates

Outside Taper 4.2 to 1 Inside Taper 3.5 to 1

Pattern Distance

43 Feet

Pattern Volume

Forward 13.85 mL Reverse 10.40 mL Total 24.25 mL




SPORT SERIES



DEAD MAN'S CURVE 3043

Latitude Ratio Coordinates

22' 3.0 to 1 41' 2.4 to 1

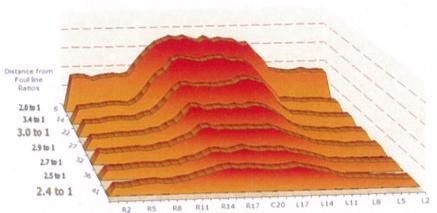


The 2D chart on the left was generated by Lane Monitor showing select tapes and ratios at key distances throughout the pattern. USBC Sport Bowling ratios are calculated at 22' and 2' before the end of the pattern. All Latitude Ratio Coordinates are calculated from these two distances.

Latitude ratios in the last half of the pattern can be an indicator of the difficulty of a pattern. Generally, the lower the ratios down lane, the more difficult the pattern.

Longitude Ratio Coordinates

Outside Taper 4.2 to 1 Inside Taper 3.5 to 1

The 3D chart below was generated by taking tapes every foot of the pattern. This gives a visual of how the conditioner tapers off from the front to the end of the pattern.

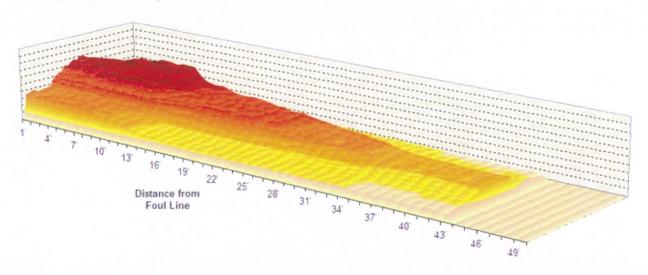



SPORT SERIES



DEAD MAN'S CURVE 3043

Kegel Sanction Technology™ Lane Machine Settings

Oil per Board (Pump Setting): 50 µL

Pattern Distance: 43 feet

				Forwar	d Settings				
Screen #	Left End of Stream	Right End of Stream	# Loads or Streams	Travel Speed (in/sec)	Beginning Distance of Load (feet)	Ending Distance of Load (feet)	# Boards Crossed per Load	Total Boards Crossed	Total Volume o Oil (µL)
01F	2	2	5	14.00	0.00	7.90	37	185	9250
02F	11	11	1	14.00	7.90	9.80	19	19	950
03F	12	12	2	14.00	9.80	13.70	17	34	1700
04F	14	14	3	18.00	13.70	21.30	13	39	1950
05F	2	2	0/	18.00	21.30	26.00			
06F	2	2	0	22.00	26.00	33.00			
07F	2	2	0	26.00	33.00	43.00			
08F							75		1 1 1
09F				7 25					
Forward Buff Screens: 3 Forward # Boards Crossed Volume mL							277	13.85	
		11 =		Rever	se Settings	9			
Screen #	Left End of Stream	Right End of Stream	# Loads or Streams	Travel Speed (in/sec)	Beginning Distance of Load (feet)	Ending Distance of Load (feet)	# Boards Crossed per Load	Total Boards Crossed	Total Volume o Oil (µL)
01R	2	2	0	30.00		32.00		1 1 1	11.2
02R	15	15	1	26.00	32.00	28.40	11	11	550
03R	13	13	2	22.00	28.40	22.20	15	30	1500
04R	12	12	2	18.00	22.20	17.10	17	34	1700
05R	11	11	2	18.00	17.10	12.00	19	38	1900
06R	10	10	1	14.00	12.00	10.10	21	21	1050
07R	2	2	2	14.00	10.10	6.20	37	74	3700
08R	2	2	0	10.00	6.20	0.00			
09R					14				
Reverse # Boards Crossed Volume mL								208	10.40
Forward plus Reverse Boards Crossed Volume mL								485	24.25

