


Oil Pattern Distance	44	Reverse Brush Drop	38	Oil Per Board	Multi ul
Forward Oil Total	20.25 mL	Reverse Oil Total	8.5 mL	Volume Oil Total	28.75 mL
Tank Configuration	A Only	Tank A Conditioner	Bronze	Tank B Conditioner	unswick Logic 2.0

	START	STOP	LOADS	MICS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	4	50	14	A	148	0.0	5.9	5.9	7400
2	8L	8R	2	50	14	A	50	5.9	9.8	3.9	2500
3	9L	9R	3	50	14	A	69	9.8	15.7	5.9	3450
4	11L	11R	3	50	14	A	57	15.7	21.6	5.9	2850
5	12L	12R	3	50	14	A	51	21.6	27.5	5.9	2550
6	13L	13R	2	50	18	A	30	27.5	32.6	5.1	1500
7	2L	2R	0	50	22	A	0	32.6	34.0	1.4	0
8	2L	2R	0	50	26	A	0	34.0	44.0	10.0	0

	START	STOP	LOADS	MICS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	50	14	A	0	44.0	26.0	-18.0	0
2	13L	13R	1	50	18	A	15	26.0	23.5	-2.5	750
3	12L	12R	2	50	18	A	34	23.5	18.4	-5.1	1700
4	11L	11R	2	50	14	A	38	18.4	14.5	-3.9	1900
5	9L	9R	2	50	14	A	46	14.5	10.6	-3.9	2300
6	2L	2R	1	50	14	A	37	10.6	8.7	-1.9	1850
7	2L	2R	0	50	14	A	0	8.7	0.0	-8.7	0

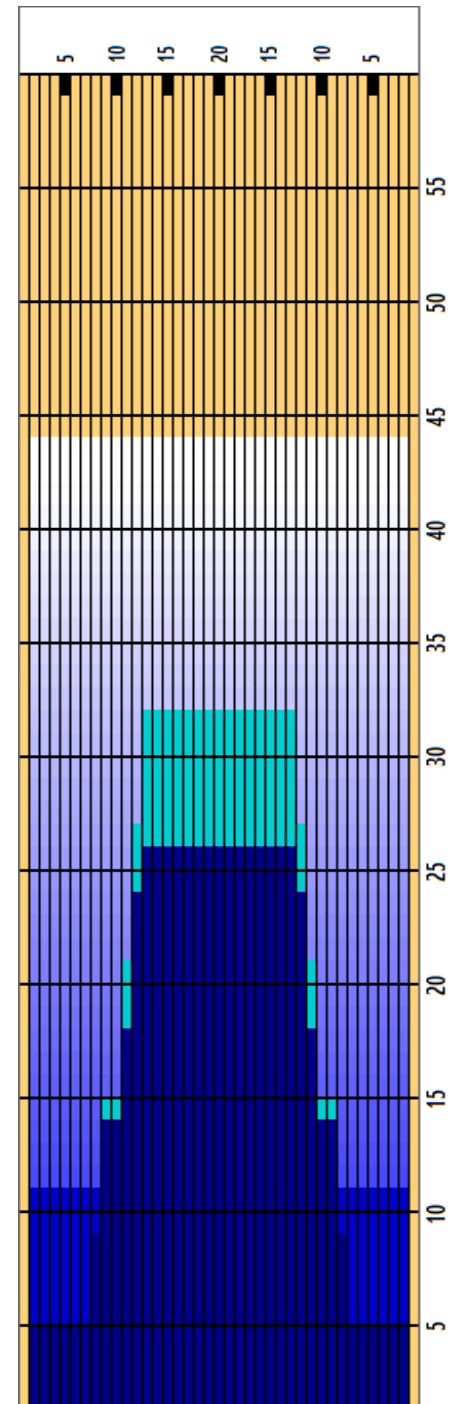

Cleaner Ratio Main Mix 5:1 Forward  
 Cleaner Ratio Back End Mix 5:1 Reverse  
 Cleaner Ratio Back End Distance 59 Combined  
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle: Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	5	1.79	1	1	1.79	5

